

Type V5LT-4Z+4Z-...


The multi-axis controller V 5 is a rugged switching device according IEC/EN 60947-5-1 for hoisting applications. The modular design enables the switching device to be used universally. The V 5 is resistant to oil, maritime climate, ozone and UV radiation.

Contact complement 2 A 250 V AC 15 or 3 A 24 V DC 13

Mechanical life 6 million (operating cycles)
Operation -40° C to +60° C
Permissible ambient temperature Storage -50° C to +80° C

Climate resistance
Damp heat constant IEC 60068-2-78
Damp heat cyclic IEC 60068-2-30
Degree of protection front IP 54 IEC/EN 60529
Technical data see catalog 5/100
Description data see catalog 5/020



Spindle block with schematic representation of the master controller installation and deflection directions.
Version shown for left-hand side installation (right-hand side installation is mirror image).





Pos.	V 51	V 5	Type expansion	Weight gramm	Type	Price EURO	
1				400	V 51		
2							
3					500	V 5	
4							
5							
7.1	Multi-axis controller left	(dir. 1-2, 3-4)			L		
7.2	Multi-axis controller right	(dir. 5-6, 7-8)			R		
10	Gate cross-shaped	(prohibits diagonal shifting)		50	P		
11	Gate special-shaped	(e.g. H-gate)		50	PX		
20	Control-handle with knob solid						
21	Control-handle with latch for mechanical zero interlock						
21.1	by lifting			50	M		
21.2							
21.4	by pushing down			50	MN		
21.5	Mechanical zero interlock with command devices see catalog 1/274						
22	Control-handle with dead man's button	1 NO		50	T		
23	Control-handle with signal button	1 NO		50	H		
24	Control-handle with push button	1 NO		60	D		
25	Control-handle with flat push button	1 NO		60	DV		
26	Control-handle with palm grip B 5			40	B 5		
27	Control-handle with palm grip B 5 with push button top	1 NO		60	B 5T		
28	Control-handle long or short						
28.2		-20 mm			S5		
28.3		+20 mm			S8		
29	More knobs, grips and T-grips with and without signal devices see catalog 1/270ff						
30	Masterswitch (contact) switching sequence 3-0-3						
31			No. of contacts	1	1		
32	Direction 1-2 and 3-4 each 1 masterswitch			2	2		
33	Switching program according contact-arrangement MS... see catalog 5/001 or to your contact-arrangement		A...	3	3		
34				4	4		
35				5	5		
36				6	6		
37	Switching sequence 4-0-4						
38	Micro changeover contact (MZT 1) with positive opening operation (additional price)			1			
39	Spring return in 0-position (for each direction)				Z		
	Friction brake adjustable (for each direction)				R		
40	Potentiometer e.t.c. each direction with mounted Wire-wound potentiometer T 130, with centre tap, 1,5 Watt wiper current max. 10 mA resistance 2 x 0,5k \pm P021, 2 x 1k \pm P022, 2 x 2k \pm P023, 2 x 5k \pm P024, 2 x 10k \pm P025		...P02 k		70	P	
41	Prepared for mounting potentiometer shaft 6 mm adjusting-angle 2 x 150°					(P)	
42	Prepared for mounting potentiometer e.t.c. adjusting-angle variable.					(P)	
43	more Potentiometer e.t.c. see catalog 1/240ff		P...				
50	Plastic housing I 120 x 160, masterswitch max. size 6				600	I	
52	More housing see catalog 1/350						
60	Indicating labels not engraved with 2 or 4 arrows						
61	Engraving, each 10 characters						
70	Command and indicating devices see catalog 1/360						




T = dead man's button
H = signal button
M = latch for mechanical zero interlock

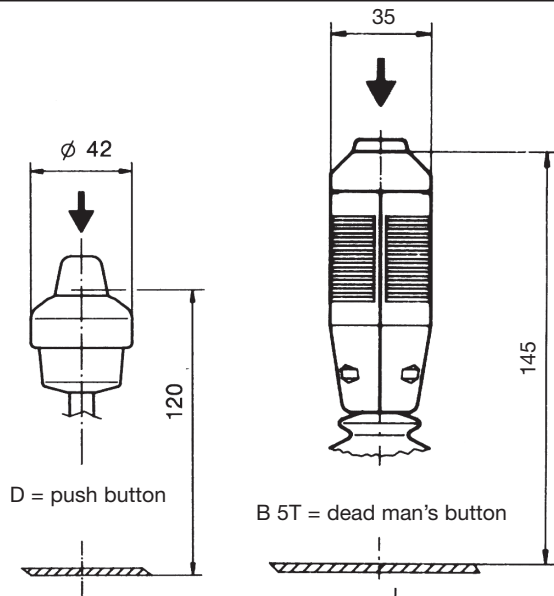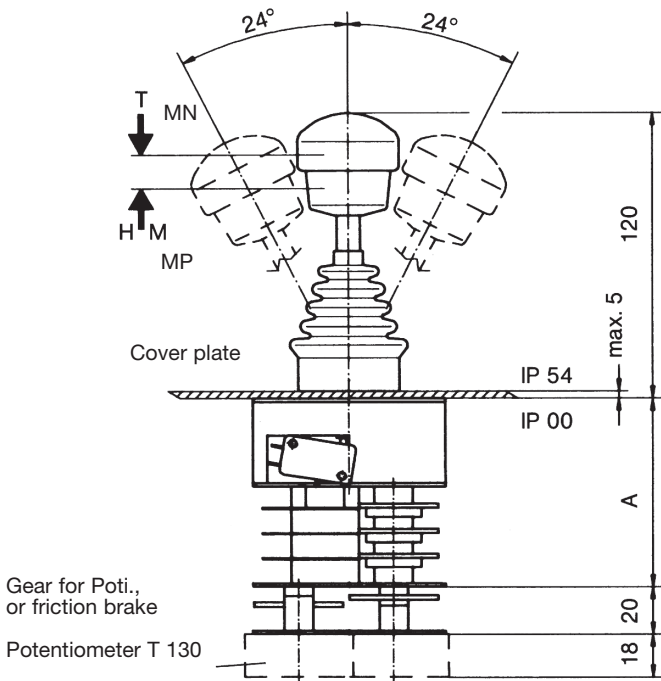

Type	No. of contacts	Dimension A
1	1	58
2	2	69
3	3	79
4	4	90
5	5	100
6	6	111

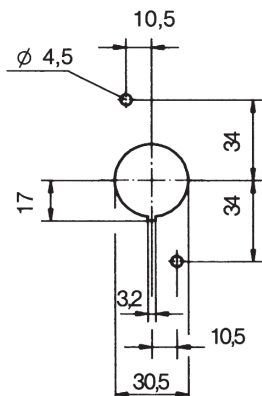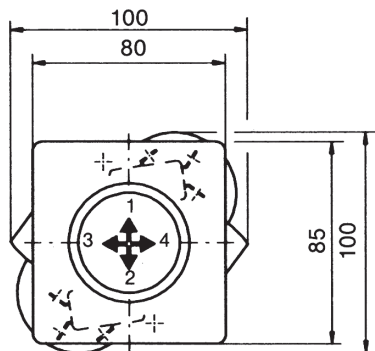

Hole pattern



Plastic housing

